




# PTSD - Square Drive Hydraulic Torque Wrench

- ProTOrC PTSD Hydraulic Square Drive Torque Wrenches are manufactured using high grade aluminium-titanium alloy and high strength alloy steel
- High repeatability can be achieved due to the precise design with an accuracy of +/- 3%
- The 360 x 180 degree uni-swivel hose coupling enables the tool to be used unrestricted in confined areas and eliminates hose kinking
- Torsion resistant housing and torsion free operation
- 360 degree positioning of reaction arm
- Anti-reverse pawl design
- Two Year Manufacturers Warranty \*



		PTSD02	PTSD05	PTSD08	PTSD10	PTSD16	PTSD20	PTSD28	PTSD36	PTSD50	PTSD70
<b>Max. Torque</b>	<b>Nm</b>	1760	4332	7420	10430	15090	19409	26447	34626	47414	69247
	<b>ft/lbs</b>	1299	3197	5476	7697	11137	14324	19518	25554	34992	51105
<b>Min. Torque</b>	<b>Nm</b>	164	433	742	1015	1509	1940	2504	3309	4741	6925
	<b>ft/lbs</b>	121	320	548	749	1114	1432	1848	2442	3499	5111
<b>Sqr. Drive</b>		3/4"	1"	1 - 1/2"	1 - 1/2"	1 - 1/2"	2 - 1/2"	2 - 1/2"	2 - 1/2"	2 - 1/2"	2 - 1/2"
<b>L1 (mm)</b>		130	170	202	228	237	273	287	323	351	376
<b>L2 (mm)</b>		102	140	160	184	192	223	248	256	271	295
<b>L3 (mm)</b>		182	249	286	326	336	391	433	464	494	528
<b>H1 (mm)</b>		52	70	81	90	100	110	120	138	153	162
<b>H2 (mm)</b>		77	98	125	134	144	164	187	206	217	226
<b>H3 (mm)</b>		96	127	149	172	181	206	221	258	279	291
<b>H4 (mm)</b>		133	165	184	207	216	241	256	293	315	326
<b>R (mm)</b>		25.8	34.8	39.8	46.8	50.8	56.8	59.8	70.8	76.8	78.8
<b>Weight (kg)</b>		2	4	7	10.6	12.9	20	25	33.8	43	52

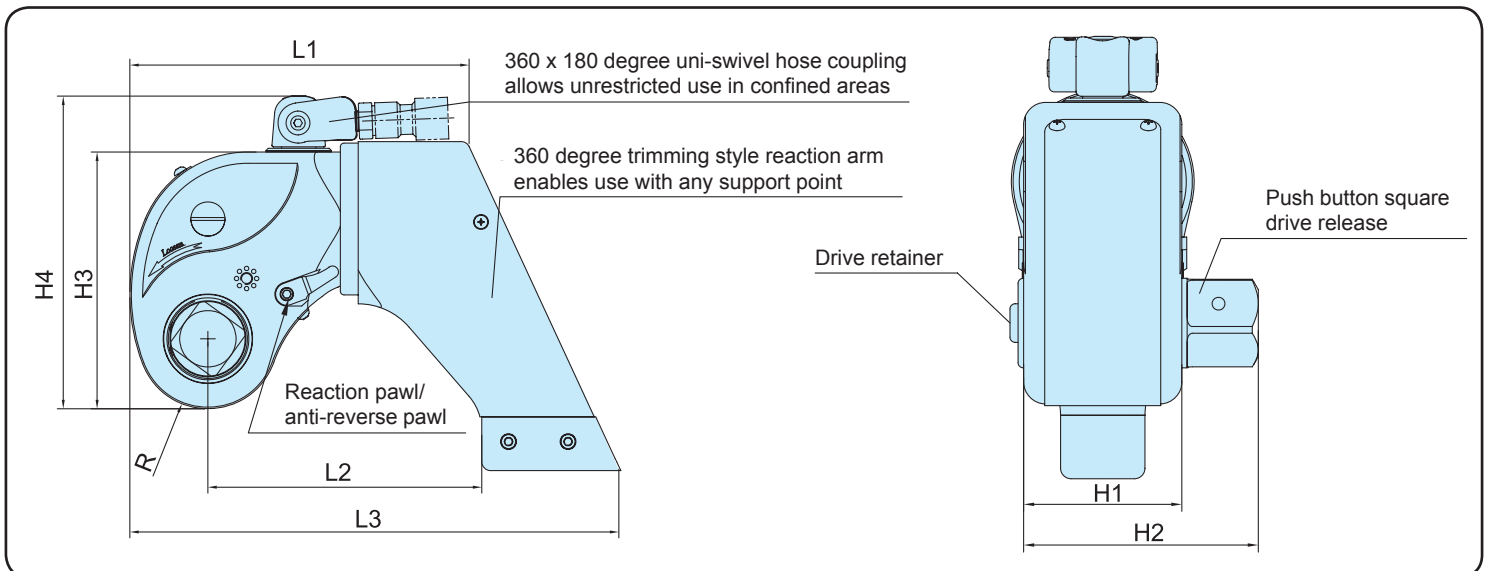

\* Conditions apply - contact ProTOrC for more information