


**SPECIAL EXECUTIONS - DOUBLE STAGE AIR MOTORS**

**PERFORMANCE RM015-2-A-0**

- Airline filtration  $\pm 5$  micron
- Operating pressure between 1-8 bar
- Lubrication oils with  $32\text{mm}^2/\text{s}$  viscosity, 1 drop per minute
- Axial loads should be kept to a minimum
- Operating temperatures  $- 10^\circ$  to  $+ 70^\circ\text{C}$

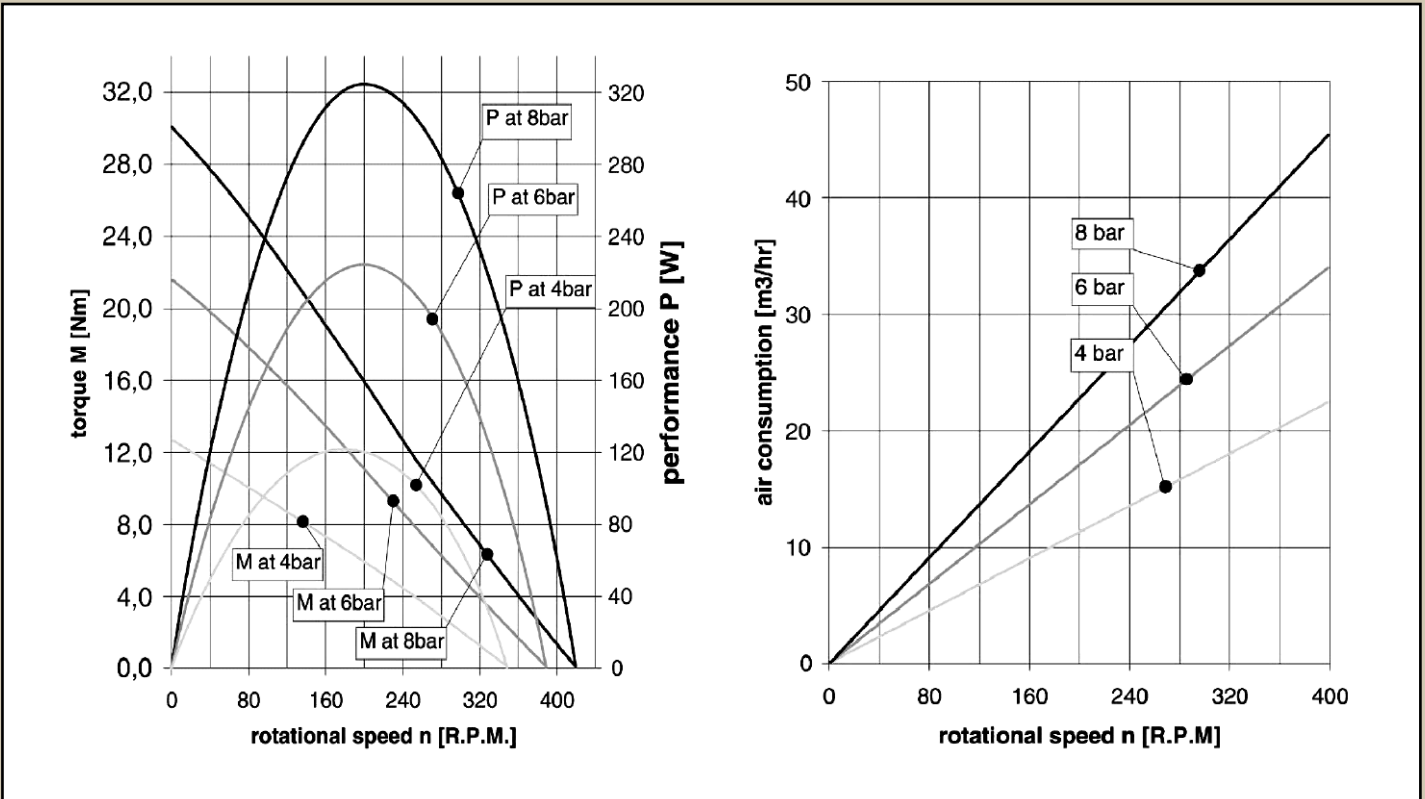

**PERFORMANCE RM025-2-A-0**

