



Model BS260 - 9" Bandsaw

- Can replace the function of traditional cold-cut saws, but with greater capacity
- Adjustable hydraulic cylinder for automatic feed option
- Swivel head can mitre cut to 60°
- Includes blade cleaning wire wheel
- Ball bearing blade guides
- 27mm wide blade minimises run-out for more accurate cutting
- Supplied on Machine Stand with integrated coolant system



MODEL	BS260
Motor	1.1kW
Blade Size (mm)	2460 x 27 x 0.9
Blade Speed (m/min)	72
Vice Tilt	0° - 60°
Cutting Capacity at 90°	● 220mm ■ 220 x 220mm ■ 260 x 110mm
Cutting Capacity at 45°	● 150mm ■ 145 x 145mm
Cutting Capacity at 60°	● 90mm ■ 85 x 85mm
Carton Dimensions (mm)	1450 x 570 x 1040 (body) 830 x 780 x 170 (stand)
Weight (kg) - Nett / Gross	220 / 264

Heavy-duty Industrial Roller Stands

Model RS-Flat

Model RS-V

- RS-Flat suitable for Bandsaws, etc
- RS-V suitable for Threading Machines, Pipe and Rod, etc



MODEL	Roller Ø mm	Nett / Gross Weight kg	Operating Height	Max Capacity kg	Measurements mm
RS-Flat	52	15.1 / 16.1	580 - 970	800	530 x 515 x 95
RS-V	52	15.6 / 16.6	580 - 970	800	530 x 515 x 95



Model BS350 - 11" Bandsaw

350 x 240mm 3-phase 11" Metal Cutting Bandsaw

- Automatic down feed stop
- Bow swivel from -45° to +60°
- 2 speeds & blade tension indication
- Cast iron arm
- Cooling system
- Synoptic control cabinet & rapid action vice
- Automatic hydraulic tilting with rotary arm
- Spare blades available



MODEL	BS350
Motor	1.1kW
Blade Size (mm)	2950 x 27 x 0.9
Blade Speed (m/min)	36, 72
Vice Tilt	-45° - +60°
Cutting Capacity at 90°	● 350mm ■ 260 x 110mm
Cutting Capacity at 45°	● 230mm ■ 230 x 150mm
Carton Dimensions (mm)	1770 x 960 x 1180 (body) 1160 x 550 x 210 (stand)
Weight (kg) - Nett / Gross	446 / 551

Replacement Bandsaw Blades



Part No.	Bandsaw Model
BS85-BLADE	Blade to suit (superseded) GARRICK BS85 Bandsaw
BSAW100-BLADE	Bandsaw Blade to suit GARRICK BSAW100 Bandsaw
BS150W-BLADE	Bandsaw Blade to suit GARRICK BS150SW Bandsaw
BS712-BLADE	Bandsaw Blade to suit GARRICK BS712 Bandsaw
BS8SW-BLADE	Bandsaw Blade to suit GARRICK BS8SW Bandsaw
BS260-BLADE	Bandsaw Blade to suit GARRICK BS260 Bandsaw
BS350-BLADE	Bandsaw Blade to suit GARRICK BS350 Bandsaw




Heavy-duty Conveyor Roller Tables

RT60-4 (1 metre)

RT60-7 (2 metre)

- Ideal for use with Bandsaws, Cold Saws etc or any other application in general workshop use where a substantial roller table is required
- Available in lengths of 1m or 2m
- They can be joined together with the included Joiner Pack to make up any length needed
- Robust clamping system for leg height adjustment
- Fine adjustment facility on feet for easy levelling

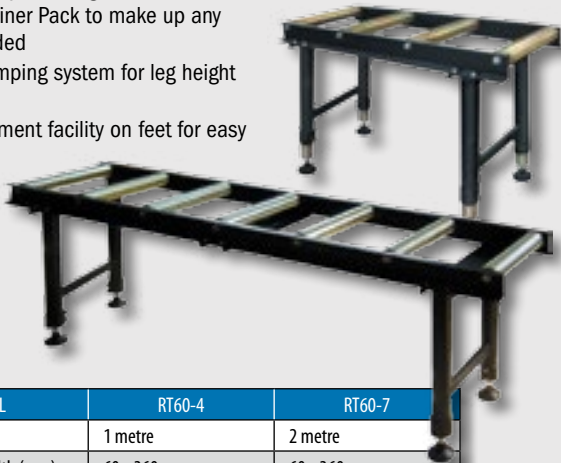

MODEL	RT60-4	RT60-7
Length (m)	1 metre	2 metre
Roller - dia x width (mm)	60 x 360	60 x 360
Operating Height (mm)	580 – 1030	580 – 1030
Max. Capacity Per Table (kg)	400	400
Weight Nett / Gross (kg)	40 / 42	63 / 67
Carton Dimensions (mm)	1030 x 475 x 190	2030 x 475 x 210

Asada

Reciprocating Pipe Saw

Model PS200SP

- Powerful 1300W (2HP) electric motor
- Variable speed switch (700 - 2,060 spm) permits cutting of wide range of materials including stainless steel
- Double insulated motor and electrical overload protection assure safe operation
- Greater safety with slow speed start function
- Lightweight - at only 3.9 kg makes it suitable for on-site, high or overhead jobs
- Supplied complete with chain vice & spare blades in sturdy carry case



MODEL	PS200SP
Motor	1300W
Cutting Capacity (mm)	50 - 200mm steel pipe 50 - 150mm stainless pipe
Weight (kg)	3.9

Spare Blades Available

- HSS Thick Blades
- Super HSS (with Cobalt) Thick Blades
- Bi-Metal Thin Blades



Geared Head Industrial Machine Drills

Model T25

- Square tables for larger work area, with 'T' slots for solid clamping
- Safety Guard with flip up cover over chuck as standard
- Emergency stop switches
- Rack & pinion table height adjustment
- Column & Quill precision machined from thick wall tube for rigidity
- Machined base
- Includes Drill Chuck & Arbor, Chuck Key and Drill Drift

MODEL	T25
Motor 2-speed (kW)	0.65 / 0.9
Drill Capacity (mm)	25
Spindle Travel (mm)	125
Morse Taper	MT3
Speeds (rpm)	105, 210, 350, 455, 700, 890, 1450, 2900
Weight (kg)	200
Feed	Manual



Heavy-duty Drill Vices

Model DV-BSM100

Model DV-TSL100

Model DV-TSL140

- Solid cast construction
- Hardened prismatic jaws
- Precision machined surfaces ensure vice bed is parallel to drill table
- Deep cut square thread (ACME) vice screw on TSL series
- Speedy adjustment by hand before inserting drive bar for final clamping



Model: DV-BSM100



Model: DV-TSL100/140

MODEL	DV-BSM100	DV-TSL100	DV-TSL140
Jaw Width (mm)	100	100	140
Opening Size (mm)	92	100	140