


## BEAVER GRADE 50 CHAIN AND COMPONENTS

### Beaver Grade 50 Stainless Steel Lifting Chain G316


Safety Factor 4:1 to AS 4797

Code	W.L.L (kg)	Size mm	S mm	R mm	F mm	Finish	Weight kg/m	UOM	Metres per 100 kg
WOX5	500	5	5	16	17.5	Stainless Steel	0.56	Metre	178
WOX7	1000	7	7	21	23.53	Stainless Steel	1.1	Metre	90
WOX10	2000	10	10	30	33.5	Stainless Steel	2.2	Metre	45
WOX13	3200	13	13	39	43.5	Stainless Steel	3.8	Metre	26

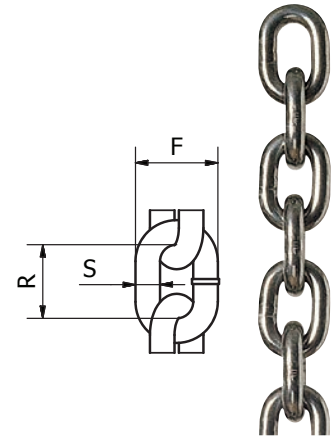

### Beaver Stainless Steel Master Link Grade 50 G316

Code	Chain Size mm		W.L.L (kg)	S mm	R mm	F mm	T mm	Approx Weight (kg)	UOM	Pack Qty
	1 Leg	2 Leg								
AWI10	5	5	700	10	80	50	-	0.14	Each	20
AWI13	7	-	1050	13	110	60	10	0.34	Each	20
AWI16	-	7	1400	16.5	110	60	14	0.53	Each	20
AWI18	10	-	2000	18.5	135	75	14	0.92	Each	20
AWI22	13	10	3200	23	160	90	17	1.6	Each	5
AWI26	16	13	5000	27	180	100	20	2.46	Each	5

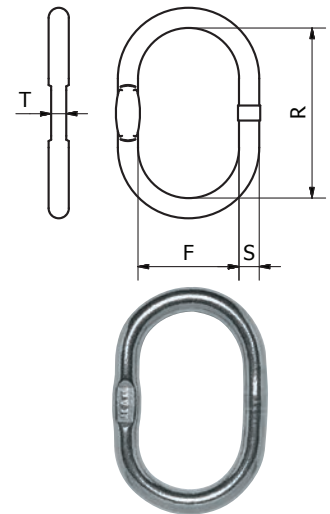

### Beaver Stainless Steel Grade 50 VLWI Shortener

Code	W.L.L (kg)	e mm	a mm	d mm	d1 mm	g mm	Weight kg
VLWI 5/6	750	80	52	16	26	8	0.18
VLWI 7/8	1250	111	68	22	34	11	0.47
VLWI 10	2000	133	86	27	40	12	0.87
VLWI 13	3200	169	108	32	52	16	1.85
VLWI 16	5000	204	134	38	64	20	3.40

