



## BEAVER WINCH BAR

### Beaver Truckers Winch Bar

*c/w Safety trigger and knurled non-slip handle for easy grip (all steel construction and chrome plated) for use with all Mark IV winches*

Code	Description	Weight (Kg)	UOM
343400S	winch bar, chrome plated with safety retaining device	2.5	Each



#### **WARNING**

- Never release the winch bar Safety Retaining Device without checking that the ratchet pawl is fully engaged between the ratchet gear teeth.
- Releasing a winch bar without the ratchet pawl being fully engaged can cause serious injury to the user or bystanders.

#### **Safety and Operating Instructions**

- "Cheater Bars" (extenders) should not be used with winch bars.
- To prevent the winch bar from slipping out and overloading the tip and / or end cap, the tip of the winch bar shall be inserted through both opposing slotted holes on the winch drum end cap of the Beaver Mark III Truck Winches.

## BEAVER TRANSPORT GENERAL

### Beaver Corner Protector

Code	Description	Pack Qty	Weight (Kg)	UOM
340000	Corner Protector 140 x 140 x 1040mm	1	2	Each
340010	Corner Protector 85 x 85 x 300mm	10	0.022	Each



### Beaver EPM Rubber Tie Downs for tarps

Code	Strap Length Inch	Max. Safe Stretch Inch	Qty Per Bag	Weight Each (Kg)	UOM	Bags Per Carton
340721	21	32	10	0.12	Each	10
340731	31	46	5	0.16	Each	20



## BEAVER PRODUCTS

### Beaver Roval Truck Wheel Wrenches

Code	Description	Weight Each (Kg)	UOM
TWB032	32mm x 17mm x 300mm	2.375	Each
TWB035	35mm x 17mm x 300mm	2.375	Each
TWB038	38mm x 21mm x 395mm	3.667	Each
TWB041	41mm x 21mm x 395mm	4.000	Each
TWB041A	41mm x 19mm x 395mm	3.833	Each
TWB114A	11/4" x 11/16" x 395mm	3.500	Each
TWB118	11/8" x 15/16" x 395mm	3.500	Each
TWB516	15/16" x 21mm x 395mm	3.500	Each
TWB516A	15/16" x 11/4" x 395mm	3.500	Each
BARTWW040	400mm Wrench Bar Only	0.920	Each
BARTWW050	500mm Wrench Bar Only	1.917	Each




## BEAVER JACK SERIES

### Beaver Roval Black Jax Series Bottle Jacks

Complies to AS/NZS 2693

Code	Description	Capacity Tonnes	D mm	D2 mm	H2 mm	W mm	Screw Adjusting Height mm	Lift Height mm	Minimum Height H minimum mm	Maximum Height H maximum (Kg)	Weight (Kg)	UOM
Jax00186	Bottle Jack	1.86	60	30	76	109	60	125	200	385	3.8	Each
Jax004	Bottle Jack	4	70	32	79	109	80	125	200	405	4.8	Each
Jax006	Bottle Jack	6	70	29	81	109	70	127	216	413	4.6	Each
Jax008	Bottle Jack	8	85	40	83	135	80	160	240	480	7.3	Each
Jax010	Bottle Jack	10	95	43	84	148	80	160	245	485	9.3	Each
Jax015	Bottle Jack	15	102	45	85	158	85	170	245	500	12.6	Each
Jax020	Bottle Jack	20	114	54	86	165	90	192	278	560	16.4	Each

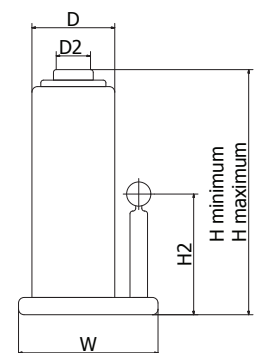

## BEAVER TRUCK WINCHES

### Beaver Reversible Ratchet Winch Bar

To suit Mark VI Truck Winches ONLY

Code	Description	Weight (Kg)	UOM
342420	Reversible Ratchet Winch Bar	2.1	Each

Compatible with Beaver's Reversible Ratchet Winch Bar (342420)



### Beaver Double Ended Slide-on Truck Winches

Complies to AS/NZS 4380

Code	Description	Hook Type	Width mm	Length m	L.C (Kg)	Weight (Kg)	UOM
342201B	D/E Slide-on winch (Bare)	n/a	n/a	n/a	2500	5.6	Each
342201	D/E Slide-on winch c/w 9m strap	Hook & Keeper	50	9	2500	7.7	Each

Compatible with Mark IV Winch Bar (342109 & 342009 Series)



#### WARNING

- Winches shall not be loaded in excess of lashing capacity.
- A minimum of two layers of polyester webbing must be wound around the winch drum when tensioning.

CARGO WINCHES ARE NOT APPROVED FOR LIFTING